

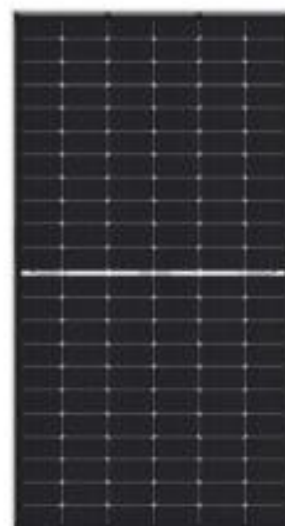


HS-66TBN 590~620-S7

N-type monocrystalline high-efficiency
bifacial double glass module

23%

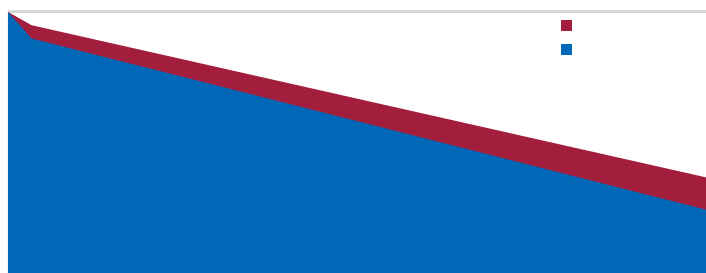

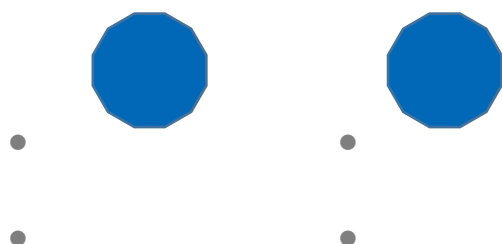

Electrical performance

HS-66TBN 590-620-S7														
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
	590	443	595	447	600	451	605	455	610	459	615	463	620	467
	40.35	37.55	40.55	37.74	40.75	37.94	40.95	38.14	41.15	38.35	41.35	38.55	41.55	38.75
(Ipm/A)	14.63	11.81	14.68	11.85	14.73	11.89	14.78	11.93	14.83	11.97	14.87	12.01	14.92	12.05
(Voc/V)	47.1	44.95	47.3	45.04	47.5	45.13	47.7	45.32	47.9	45.51	48.1	45.70	48.3	45.89
(Isc/A)	15.65	12.64	15.7	12.68	15.75	12.72	15.8	12.76	15.85	12.80	15.89	12.84	15.93	12.88
(%)			22%		22.2%		22.4%		22.6%		22.8%		23.0%	
(°C)							-40°C ~ +85°C							
							1500V.DC.(IEC)							

STC Irradiance1000W/m² Cell temperature 25 Air quality=1.5
NOCT: Irradiance 800W/m² Ambient temperature 20 Air quality =1.5 Wind speed 1m/s