


N-type monocrystalline
high-efficiency bifacial
double glass module

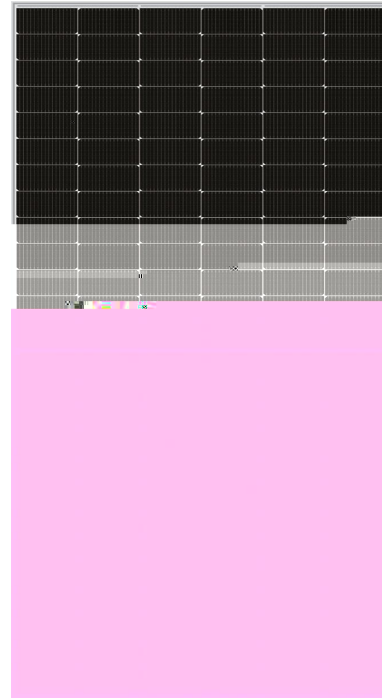

Prod c fea re

The hole ind r chain in egra ed prod c ion
Pol ilicon afer cell gla frame j nc ion bo are
all elf prod ced and he o erall compabili i be er

Be er empera re coefficient

Impro e po er genera ion a high empera re and increa e
po er o p b

Higher bifaciali

Bifaciali can be a high a i h back ide gain p o
in and condi ion

High con er ion efficienc



Wi h o anding cell echnolog and ad anced
man fac ring proce e he mod le can achie e
con er ion efficienc p o

E cellen performace in lo ligh in en i

Impro e he performance of po er genera ion nder
lo ligh condi ion cha in he morning or e ening
and in clo d and rain da

High reliabili

The mod le ha be er ainabili in har h
en ironmen cha in high cold area de er and
m dfla af er more rigoro e ing

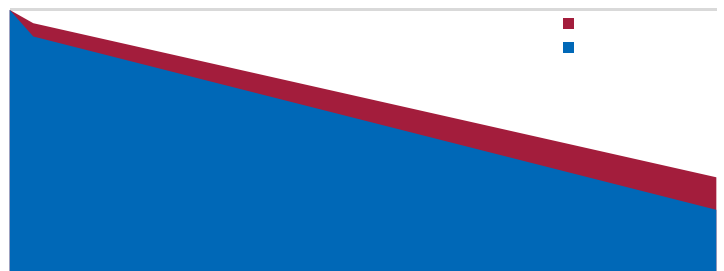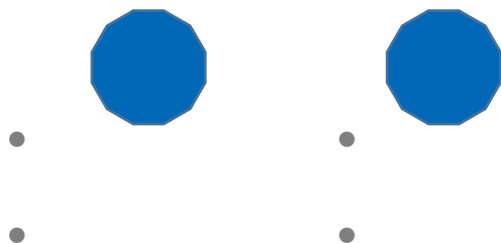

Cell type	N-type Monocrystalline solar cells
Number of half cell	156 (6×26)
Dimensions	2465×1134×35mm
Weight	34.3kg
Front Glass	2.0mm high transparent coated glass
Back Glass	2.0mm Semi-tempered glass
Frame	Anodized aluminum alloy
Junction box	IP68
Output cable	4.0mm ² ; + 400/-200mm or customised
Size of each pallet	2466×1140×1250mm

HS-78TBN 610-630-S3

	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
	610	466	615	470	620 524	474	625	478	630	481
