

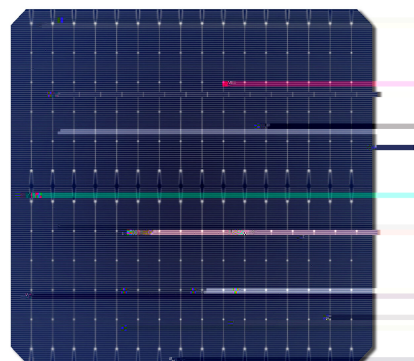


高效双面单晶电池

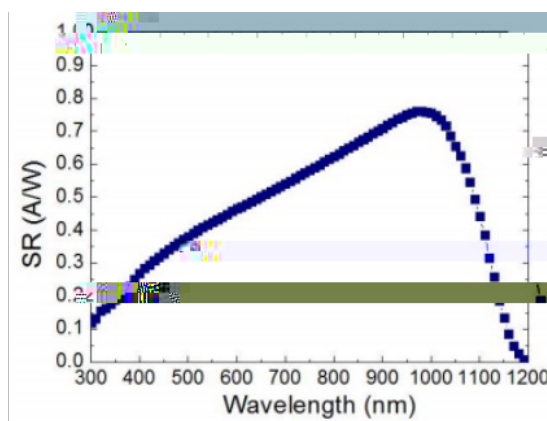

产品特性

	182	*183.75	!0.25	,	247	!0.25			: -0.26%/
	145±15								: +0.046%/
(+)	16*0.04!	0.03	主	(),	148	副	,	()	: -0.32%/
(-)	16*0.04!	0.03	主	(),	120	副	,	()	50 , 2 0.8

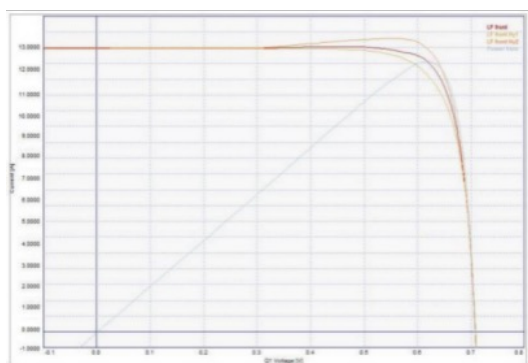

代		出 出 出						充
		(%)	()	()	()	()	()	(%)
-182	-252	25.2	8.39	0.639	13.131	0.719	13.782	84.69
-182	-251	25.1	8.36	0.638	13.110	0.719	13.770	84.44
-182	-250	25.0	8.33	0.635	13.111	0.717	13.769	84.36
-182	-24	24.9	8.29	0.633	13.107	0.714	13.769	84.32
-182	-248	24.8	8.26	0.630	13.112	0.713	13.772	84.20
-182	-247	24.7	8.23	0.630	13.062	0.713	13.745	83.95
-182	-246	24.6	8.19	0.626	13.085	0.710	13.765	83.82
-182	-245	24.5	8.16	0.625	13.055	0.708	13.748	83.81
-182	-244	24.4	8.13	0.622	13.061	0.707	13.753	83.62
-182	-243	24.3	8.10	0.620	13.054	0.704	13.739	83.68
-182	-242	24.2	8.06	0.618	13.037	0.703	13.727	83.49
-182	-241	24.1	8.03	0.616	13.023	0.700	13.726	83.52
-182	-240	24.0	7.99	0.615	12.989	0.701	13.718	83.17
-182	-23	23.9	7.96	0.613	12.995	0.699	13.729	82.91
-182	-238	23.8	7.93	0.611	12.971	0.698	13.715	82.82
-182	-237	23.7	7.89	0.610	12.932	0.700	13.737	82.10
准 件: 1000 / ² , 1.5, 25								